


Concrete Pave Stones
Delta-Stone

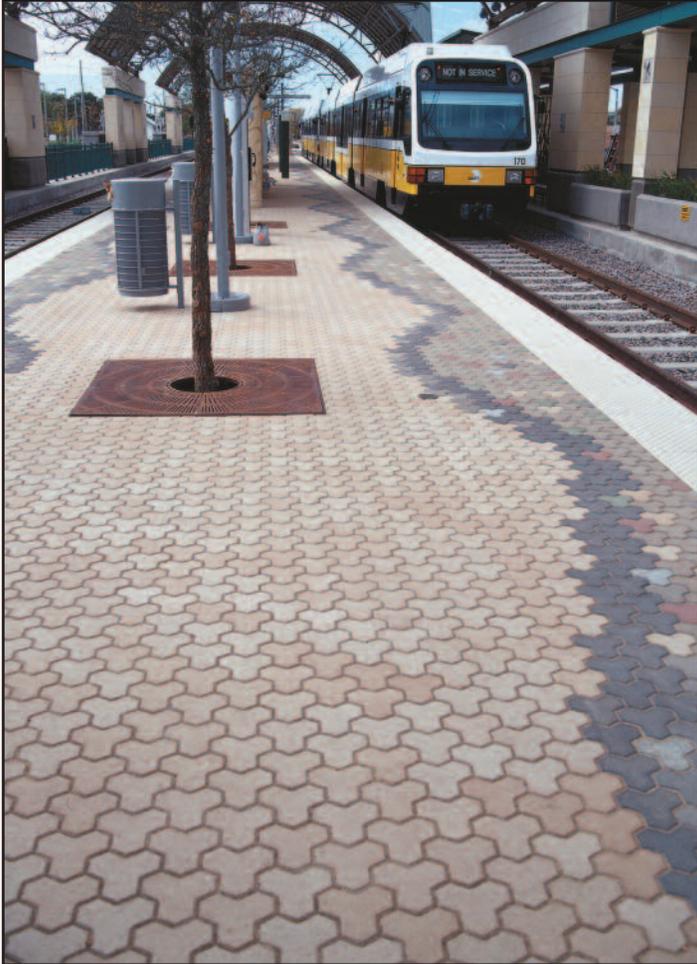

**IMPROVING
YOUR
LANDSCAPE™**

PAVESTONE®

Delta-Stone

Delta-Stone, a designer favorite, produces a unique mosaic pattern that pleases even the most discerning of tastes. Its shape provides an economical, permanent surface that's ideal for residential and commercial applications. Delta-Stone boasts a proven track record of distinctive patterns and design ingenuity.

COMPOSITION AND MANUFACTURE

Delta-Stone is made from a "no slump" concrete mix. Made under extreme pressure and high frequency vibrations, Delta Stone has a compressive strength greater than 8000psi, a water absorption maximum of 5% and will meet or exceed ASTM C-936.

INSTALLATION

1. Excavate unsuitable, unstable or unconsolidated subgrade material and compact the area which has been cleared. Backfill and level with dense graded aggregate suitable for base material. Typically the base material is 4 in. to 8 in. (101mm to 202mm) in depth (100-152mm) of compacted base for light vehicular and pedestrian traffic or as otherwise directed by Site Engineer/Architect/Landscape Architect.
2. Place bedding course of washed sand conforming to the grading requirements of ASTM C-33 to a uniform depth of 1-1 $\frac{1}{2}$ in. (25-38mm) screeded to the grade and profile required.
3. Install Delta-Stone with joints approximately $\frac{1}{8}$ in. (3mm) in width.
4. Where required, cut pavers with an approved cutting device to fit accurately, neatly and without damaged edges.
5. Tamp pavers with a plate compactor, uniformly level, true to grade to grade and free of movement.
6. Spread sand to $\frac{1}{8}$ in. thickness over entire paving area. Stabilization of jointing sand may be required.
7. Make one more pass with plate compactor to fill joints with sand.

Complete installation & specification details are available by contacting your Pavestone Company Sales Representative.

Note: Colors are shown as accurately as possible in brochures & samples, but due to the nature of the product, regional color differences and variables in print reproduction, colors may not match exactly. For best results in maintaining color consistency, pavers must be installed from several cubes at a time. Efflorescence, a whitish, powder-like deposit, may appear on concrete pavers. This is a natural occurrence in any concrete product and will usually wear off over time.

APPLICATIONS

Residential Driveways • Patios • Sidewalks • Terraces
Pool Decks • Pedestrian Malls • Medians • Garden Pathways • Esplanades • Plazas • Gazebos • Portecocheres • Hotel Entrances • Golf Cart Paths

PRODUCT INFORMATION

Delta-Stone is available in a height/thickness of 2 $\frac{3}{8}$ " = 60mm. Quantity/sq. ft. approximately 4.27 stones.




Delta-Stone


Nominal Dimensions	6" W x 7" L 152.4mm x 177.8mm
Height/Thickness	2 $\frac{3}{8}$ " = 60mm
Wt./Stone	7 lbs.
Stones/Sq. Ft.	4.27
Stones/Pallet	420
Approx. Wt./Pallet	2,660 lbs.
Sq. Ft./Pallet	95
Product Number	556

Note: Product not available in all markets. Fractional dimensions are nominal.

INSTALLATION PATTERN

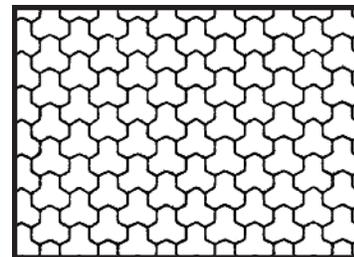

Typical Cross Section Of Concrete Paver Installation

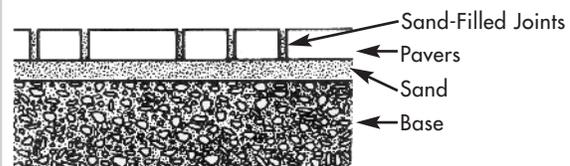

PAVESTONE[®]
Improving Your Landscape™
www.pavestone.com

- Atlanta, GA: (770) 306-9691
- Austin/San Antonio, TX: (512) 558-7283
- Boston, MA: (508) 947-6001
- Charlotte, NC: (704) 588-4747
- Cincinnati, OH: (513) 474-3783
- Colorado Springs, CO: (719) 322-0101
- Dallas/Ft. Worth, TX: (817) 481-5802
- Denver, CO: (303) 287-3700
- Hagerstown, MD: (240) 420-3780
- Houston, TX: (281) 391-7283
- Kansas City, MO: (816) 524-9900
- Las Vegas, NV: (702) 221-2700
- New Orleans, LA: (985) 882-9111
- Phoenix, AZ: (602) 257-4588
- Sacramento, CA: (916) 452-5233
- St. Louis/Cape Girardeau, MO: (573) 332-8312
- Winters, CA: (530) 795-4400