

# RX-9 Specifications

|  | <b>RX-9</b>          | <b>RX-9-L</b>        |
|--|----------------------|----------------------|
| <b>Max. Vehicle Gross Weight:</b>      | 9,000 lbs. (4082 kg) | 9,000 lbs. (4082 kg) |
| <b>Max. Wheelbase:</b> General service | 160" (4064 mm)       | 175" (4445 mm)       |
| Two-wheel alignment                    | 146" (3708 mm)       | 161" (4089 mm)       |
| Four-wheel alignment                   | 138" (3505 mm)       | 158" (4013 mm)       |
| <b>Min. 4-Wheel Alignment:</b>         | 88" (2235 mm)        | 88" (2235 mm)        |
| <b>Runway Width:</b>                   | 24" (609 mm)         | 24" (609 mm)         |
| <b>Lowered Height:</b>                 | 9" (229 mm)          | 9" (229 mm)          |

|                            |                                  |
|----------------------------|----------------------------------|
| <b>Alignment height</b>    | All lock positions               |
| <b>Max. lifting height</b> | 72" (1829 mm)                    |
| <b>Tread width</b>         |                                  |
| Min. inside                | 40" (1016 mm)                    |
| Max. outside               | 88" (2235 mm)                    |
| <b>Motor</b>               | 208-230 VAC,<br>60 Hz, 26A, 1 ph |
| <b>Air</b>                 | 90-120 psi                       |

## Models

- RX-9:** RX Lift without jacking system
- RX-9-L:** Long Deck RX Lift without jacking system
- 43:** RX Lift plus two 4500-lb. capacity swing air jacks
- P:** Flush-mount version
- RX9L-PS:** Long Deck RX Lift with PowerSlide locking slipplates (includes swing jacks)
- RX9L-IS:** Long Deck RX Lift with PowerSlide locking slipplates and Inflation Station (includes swing jacks)

## Standard Equipment


- Two Movable Work Steps (not included with flush model)
- Front Wheel Stops
- Two Wheel Chocks
- Air Line Kit
- Full-Floating Rear Wheel Slipplates
- Louvered Ramps with Built-In Wheel Stops

See Hunter Sales Representative for details on site requirement.

Because of continuing technological advances, specifications, models and options are subject to change without notice.



**RX-9 Plan View**

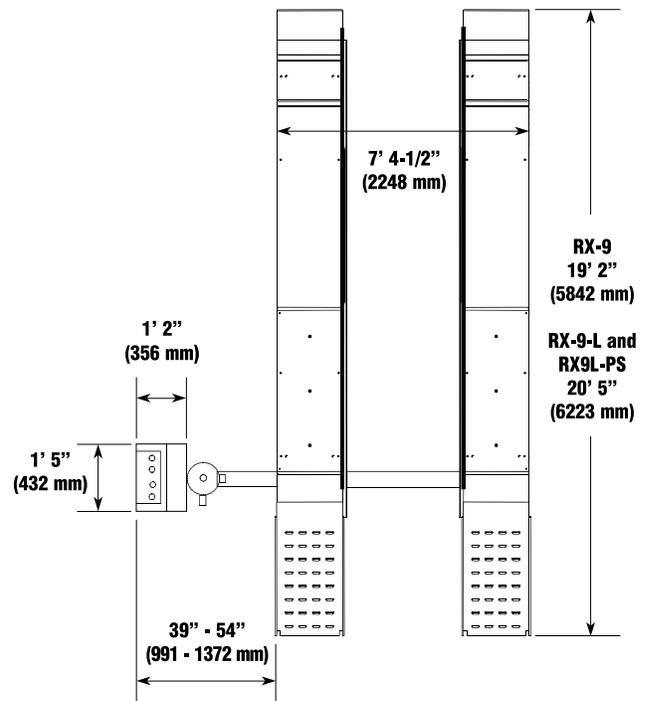

The Hunter RX-9 Series Scissor Lift has been certified under the program conducted by Automotive Lift Institute (ALI) and ETL Testing Laboratories to comply with Safety Standard ANSI/ALI, ALCTV and Electrical Standard ANSI/UL 201.